

WWW.RAMIAUDIO.COM



Dante™

JOKER

Pupitre trois commentateurs - Dante
Three commentators unit - Dante



Le JOKER est un pupitre trois commentateurs, dont une entrée pour un invité. Il comprend toutes les fonctionnalités nécessaires pour les commentateurs sportifs, comme la mise à l'antenne, les envois et retours d'ordres ainsi qu'un monitoring configurable individuellement.

Le JOKER est équipé d'un port IP et d'un web serveur embarqué. Celui-ci permet, sans logiciel dédié, de prendre la main à distance sur les commandes.

- Trois entrées microphones sur XLR symétriques, deux commentateurs et un invité, avec commutation de l'alimentation fantôme 12 ou 48 Volts.
- Un mode "HELP" pour parler à l'ingénier support.
- Commutation ligne sur l'entrée invité pour permettre la diffusion d'un message enregistré.
- Switch ON AIR lumineux pour les trois entrées.
- Switch lumineux départ Talkback A et Talkback B sur les entrées commentateurs 1 et 2.
- Les départs Talkback annulent le départ ON AIR pendant l'envoi de l'ordre.
- Switch départ Talkback 2 pour le commentateur 1 et Talkback 1 pour le commentateur 2. Cela permet les ordres entre les journalistes.
- Le JOKER est livré avec son alimentation externe. Pour des raisons de sécurité, il est alimenté en tension continue de 9 à 18 Volts.

The JOKER is a three commentators unit whose an input for a guest. It includes all the features needed for sports commentators, such as making the antenna, sends and returns as well as monitoring talkback individually configurable.

The JOKER has an IP port and an embedded web server. This allows both the specific programming of the equipment in controls and secondly to take control of remote commands, without specific software.

- Three microphones inputs on balanced XLR, two commentators and a guest, with a phantom power supply 12 or 48 volts.
- "HELP MODE" for talking to support engineer.
- Switching line on the guest input to allow the diffusion of a recorded message.
- Luminous ON AIR switch for three inputs.
- Luminous switch to send Talback A and B to commentators 1 and 2 inputs.
- ON AIR output is muted when one of the talkback switch is pressed.
- Switch to send Talkback 2 to commentator 1 and Talkback 1 to commentator 2. This allows talkbacks among the journalists.
- JOKER is delivered with external power supply. For safety reasons it is supplied with DC voltage 9 to 18 volts.


Rear Panel



Le JOKER propose des entrées/sorties GPI/GPO sur un connecteur Sub D-15. Elles permettent de commander ou d'avoir le reflet de l'état "ON AIR" de chaque commentateur. Le mode IP permet une utilisation en stand alone.

The JOKER offers input/output (GPI/GPO) on a Sub-D 15 pin connector. They are used to control or have the reflection of the "ON AIR" state of every commentator. IP mode even allows use in stand alone.

Application

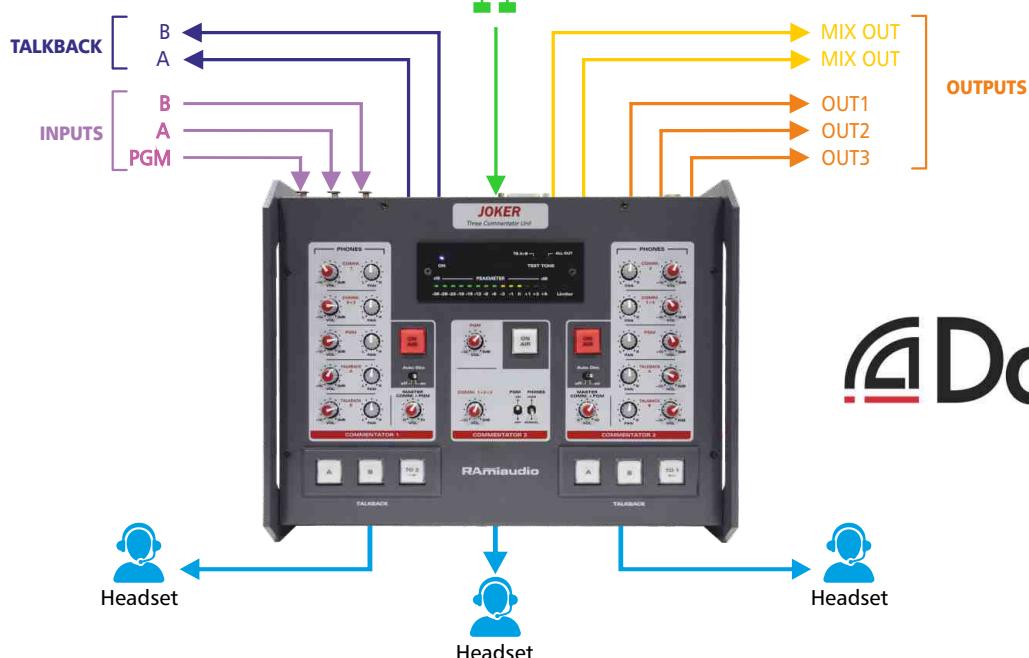

Dante™

Technical Specifications

Input	Mic: -70dBu to -15dBu Ligne : -35 dBu to +20 dBu
	PGM / Talkback / A & B: +4dBu Max level: +24dBu
Output	1 / 2 / 3 / Talkback / Mix: +4dBu Max level: +24dBu
Audio	Dist: < 0.01% (+20dBu out / 1KHz) BP: 15Hz to 25KHz Noise to the input (MIC): -129 dBu(A)
Power	9 to 18V DC / 1A max / External power supply: 90 - 260V AC
Size	330 x 240 x 100 mm
Weight	4,9 Kg

3 year guarantee

French Manufacture

RAMIAUDIO

7 Rue Raoul Follereau - 77600 Bussy-Saint-Georges - FRANCE

TEL : +33 (0) 1 64 66 20 20 - Fax : +33 (0) 1 64 66 20 30 - rami@ramiaudio.com



Configurer et contrôler l'appareil à distance grâce au serveur web embarqué. L'ensemble des réglages des pré-amplis et des commutations sont accessibles en temps réel (sensibilité, ON AIR, alim. fantôme, talkback...)

Configure and control the remote device with the embedded web server. All settings preamps, commutations are accessible in real time (sensitivity, ON AIR, phantom power, talkback...).